

Simplex



EcoTRAN™ System


Specifications:

inches (mm)

BASINEngineered Polypropylene Copolymer, 2-piece construction, factory assembled with preformed corrosion resistant rebar installed. Includes POD for pump support and orientation RISER......HDPE 18" Dia. (457mm) corrugated drainpipe, day-of-installation adjustment sets basin depth [limit 9ft. 6inches (2.9m) to bottom of basin] DISCHARGE OUTLET.....1-1/4" NPT Flexible, stainless steel. Connects to a basin mounted bronze tank receiver. INLET3 positions, 4" (Sch 40/80 or SDR35) Flexible Inlet Flange (For Field Installation) COVERRock-Shaped Polyethylene Cover, interlocking with Riser Adapter, vented or unvented. Keyed lock included. Load rating of 150 lb per sq ft. ALARM BOX.. Model 1500 Alarm Panel, NEMA 4X Non-metallic Enclosure with Keyed Lock, Alarm Light, Alarm Horn w/Push Button, Pump and Alarm Circuit Breakers DIRECT BURIAL CABLE12/5 Type TC, STOOW Round U.L. Listed. 30ft (9m) length standard MOVEABLE DISCHARGE FITTING w/ CHECK VALVE: (Removed with Pump) Housing.....Powder Coated Cast Iron Diaphragm......Fiber Reinforced Neoprene Flapper Fiber Reinforced Nitrile Size.....1-1/4" Full Port Valve Seat......Bronze BALL VALVE:Toggle actuated via polypropylene harness from top side, removable without basin entry Material...... ... Bronze, with Stainless Steel ball & stem, and Teflon seats Size.....1-1/4" Full Port LIFTING HARNESS......1/8" x 3/4" Polypropylene (POD). 1/2" Dia. Polypropylene (PUMP) Breaking strength 3750 lbs. HARDWARE300 Series Stainless Steel LEVEL CONTROLDirect control of pump motor with alarm ESPS™.....Environmentally sealed pressure switch with CPVC housing, HNBR diaphragm, custom molded quick connect for sealing and strain SensaPROMechanical Level Control with custom molded quick connect for sealing and strain relief. ANTI-SIPHONIntegral to cast iron motor housing. Flapper.....Fiber Reinforced Nitrile Seat......Valox with stainless steel rivet PUMPOGP2022CE (Std), 240 Volt, 1 Phase




OPTIONSDirect Burial Cable lengths, Rock Cover



Vented or Flood Plain, Flat Cover Vented or

Model 1550 Alarm Panel w/Generator Receptacle

Flood Plain, Depth, OGVF2022CE Pump,

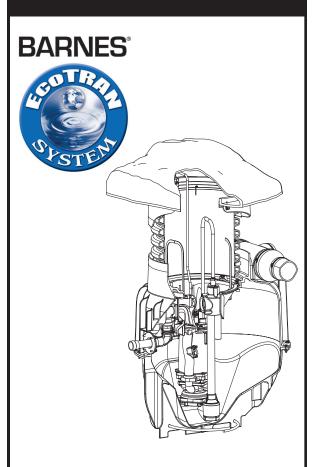

EcoTRAN™ System

For use with OGP and OGV pumps, 11/4" NPT

Vented 52"-74" Depth Vented 76"-114" Depth Flood Plain 52"-74" Depth Flood Plain 76"-114" Depth

This product may be covered by one or more of the following patents and other patent(s) pending: US Patent 7,357,341 & US Patent 7,578,657



WARNING:

CANCER AND REPRODUCTIVE HARM - WWW.P65WARNINGS.CA.GOV



PUMPS & SYSTEMS

SECTION ECO PAGE 1 DATE 5/19



Short Set EcoTRAN Package - Vented Cover									
Direct	OGP Pump				OGV Pump				
Burial Cable	Standard Alarm Box		Alarm with Generator Receptacle		Standard Alarm		Alarm with Generator Receptacle		
Length	Part No.	SC	Part No.	SC	Part No.	SC	Part No.	SC	
30 Ft.	122848	NS	122854	CF	122851	NS	122857	CF	
50 Ft.	122849	NS	122855	CF	122852	NS	122858	CF	
100 Ft.	122850	NS	122856	CF	122853	NS	122859	CF	

Long Set EcoTRAN Package - Vented Cover										
Direct Burial Cable		OGP	Pump		OGV Pump					
	Standard Alarm Box		Alarm with Generator Receptacle		Standard Alarm		Alarm with Generator Receptacle			
	Part No.	SC	Part No.	SC	Part No.	SC	Part No.	SC		
30 Ft.	124146	NS	124152	CF	124149	NS	124155	CF		
50 Ft.	124147	NS	124153	CF	124150	NS	124156	CF		
100 Ft.	124148	NS	124154	CF	124151	NS	124157	CF		

Short Set EcoTRAN Package - Non-Vented Cover										
Direct Burial Cable	OGP Pump				OGV Pump					
	Standard Alarm Box		Alarm with Generator Receptacle		Standard Alarm		Alarm with Generator Receptacle			
	Part No.	SC	Part No.	SC	Part No.	SC	Part No.	SC		
30 Ft.	122860	CF	122866	CF	122863	CF	122869	CF		
50 Ft.	122861	CF	122867	CF	122864	CF	122870	CF		
100 Ft.	122862	CF	122868	CF	122865	CF	122871	CF		

Long Set EcoTRAN Package - Non-Vented Cover										
Direct Burial Cable		Pump		OGV Pump						
	Standard Alarm Box		Alarm with Generator Receptacle		Standard Alarm		Alarm with Generator Receptacle			
	Part No.	sc	Part No.	SC	Part No.	SC	Part No.	SC		
30 Ft.	124158	CF	124164	CF	124161	CF	124167	CF		
50 Ft.	124159	CF	124165	CF	124162	CF	124168	CF		
100 Ft.	124160	CF	124166	CF	124163	CF	124169	CF		

NOTES:

* Add FC suffix to part number for Flat Cover Flood Plain Add FCV suffix to part number for Flat Cover Vented Add P suffix to part number for SensaPRO Mechanical Level Control

SECTION ECO PAGE 2 DATE 5/18





Simplex



EcoTRAN™ System

1. Depth 52"-74" (1.3m-1.8m) Vented

76"-114" (1.9m-2.9m) Vented 52"-74" (1.3m-1.8m) Flood Plain 76"-114" (1.9m-2.9m) Flood Plain

2. Pump Type (240V / 1 Phase)

2 HP OGP2022CE (STD.) 2 HP OGVF2022CE

3. Direct Burial Cable Length

30 Feet (STD.) 50 Feet 100 Feet

4. Cover Options (Select One)

Rock Cover

Sandstone

Flood Plain, Sandstone

Flat Cover

Vented Flood Plain

5. Alarm Box Options

Model 1500 w/Alarm Light, Horn, Silence Button & Circuit Breaker Model 1550, includes 1500 features, Plus Generator Receptacle and Automatic Transfer Switch

6. Level Control (Select One)

ESPS™ SensaPRO

NOTES!

- Unit shipped boxed complete including Basin Package, Pump, Level Control and Alarm Box (Riser shipped separately).
- Riser depth can be shortened in the field during installation.
- 3. All moving parts and seals serviceable from ground level without entry into the basin.



PUMPS & SYSTEMS

SECTION ECO PAGE 3 DATE 5/18

